

LP141WP1
Liquid Crystal Display

Product Specification

SPECIFICATION FOR APPROVAL

(■) Preliminary Specification

() Final Specification

Title	14.1" WXGA+ TFT LCD
-------	---------------------

Customer	Dell
MODEL	

SUPPLIER	LG.Philips LCD Co., Ltd.
*MODEL	LP141WP1
Suffix	TLA3

*When you obtain standard approval,
please use the above model name without suffix

SIGNATURE	DATE
_____ /	_____
_____ /	_____
_____ /	_____

Please return 1 copy for your confirmation with your signature and comments.

SIGNATURE	DATE
_____ S.C. Yoon / G.Manager	_____
REVIEWED BY	
_____ G.J. Han / Manager	_____
PREPARED BY	
_____ I.Y.Jung / Engineer	_____
_____ H.G.Kim / Engineer	_____

Products Engineering Dept.
LG. Philips LCD Co., Ltd



LG.PHILIPS LCD

LP141WP1
Liquid Crystal Display

Product Specification

Contents

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	
3-1	ELECTRICAL CHARACTERISTICS	6
3-2	INTERFACE CONNECTIONS	7
3-3	SIGNAL TIMING SPECIFICATIONS	9
3-4	SIGNAL TIMING WAVEFORMS	9
3-5	COLOR INPUT DATA REFERENCE	10
3-6	POWER SEQUENCE	11
4	OPTICAL SPECIFICATIONS	12
5	MECHANICAL CHARACTERISTICS	16
6	RELIABILITY	20
7	INTERNATIONAL STANDARDS	
7-1	SAFETY	21
7-2	EMC	21
8	PACKING	
8-1	DESIGNATION OF LOT MARK	22
8-2	PACKING FORM	22
9	PRECAUTIONS	23
A	APPENDIX. Enhanced Extended Display Identification Data (EEDID™)	25
		27



LP141WP1
Liquid Crystal Display

Product Specification

RECORD OF REVISIONS

[illegible]

LP141WP1
Liquid Crystal Display


Product Specification

1. General Description

The LP141WP1 is a Color Active Matrix Liquid Crystal Display with an integral Cold Cathode Fluorescent Lamp (CCFL) backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 14.1 inches diagonally measured active display area with WXGA+ resolution(900 vertical by 1440 horizontal pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP141WP1 has been designed to apply the interface method that enables low power, high speed, low EMI.

The LP141WP1 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP141WP1 characteristics provide an excellent flat display for office automation products such as Notebook PC.

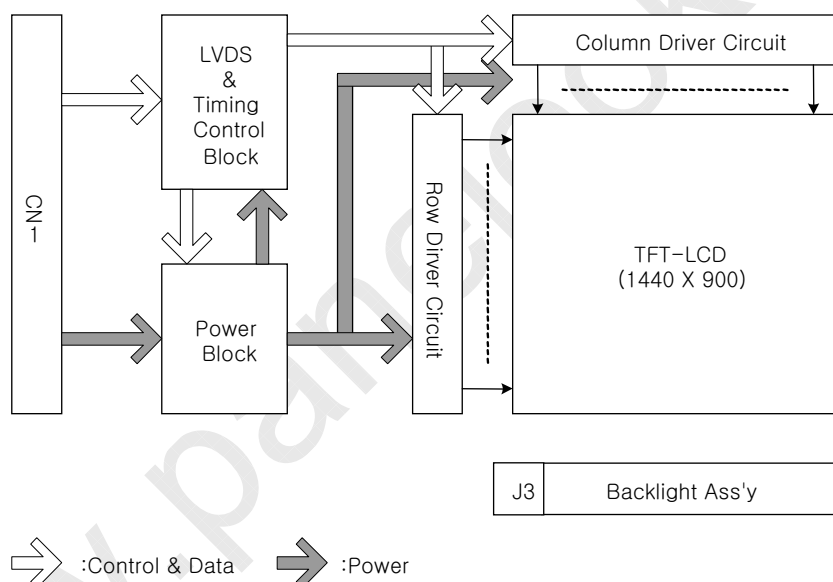

General Features

Active Screen Size	14.1 inches diagonal
Outline Dimension	320 (H) × 206(V) × 5.5(D) mm [Max]
Pixel Pitch	0.2109 mm × 0.2109 mm
Pixel Format	1440 horiz. By 900 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	220 cd/m ² (Typ.5 point)
Power Consumption	Total 6.0 Watt(Typ.) @ LCM circuit 1.9Watt(Typ.), B/L input 4.1Watt(Typ.)
Weight	435 g (Max.), 425g(Typ.)
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Anti-glare treatment of the front polarizer
RoHS Comply	Yes


LG.PHILIPS LCD

LP141WP1
 Liquid Crystal Display

Product Specification


2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 ± 5°C
Operating Temperature	TOP	0	50	°C	1
Storage Temperature	HST	-20	60	°C	1
Operating Ambient Humidity	HOP	10	90	%RH	1
Storage Humidity	HST	10	90	%RH	1

Note : 1. Temperature and relative humidity range are shown in the figure below.
 Wet bulb temperature should be 39°C Max, and no condensation of water.

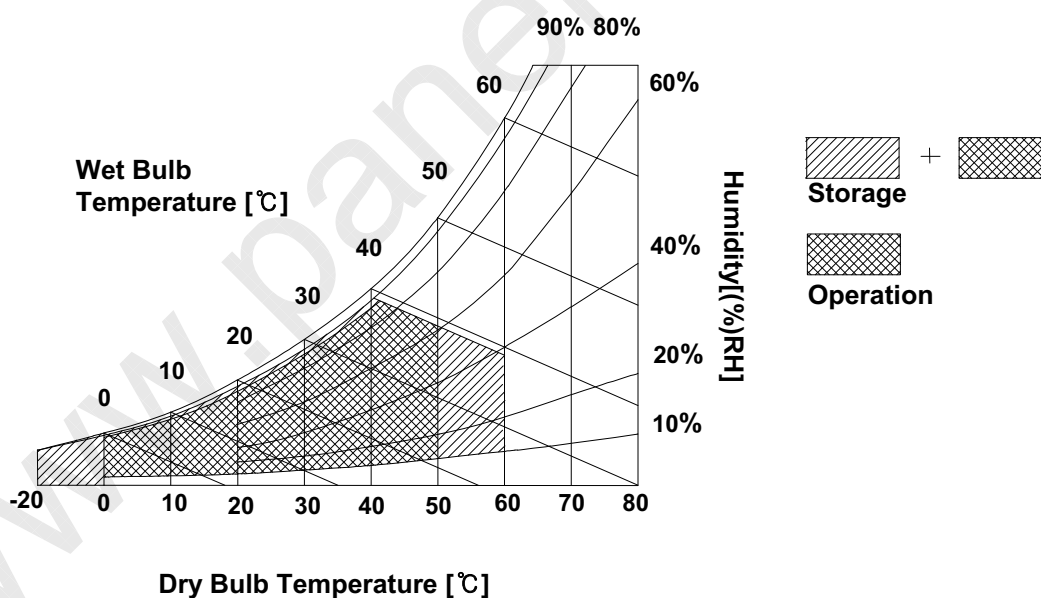



LP141WP1
Liquid Crystal Display

Product Specification

3. Electrical Specifications

3-1. Electrical Characteristics

The LP141WP1 requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input which powers the CCFL, is typically generated by an inverter. The inverter is an external unit to the LCD.

Table 2. ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
MODULE :						
Power Supply Input Voltage	VCC	3.0	3.3	3.6	V _{DC}	
Power Supply Input Current	I _{CC}	-	560	645	Ma	1
Power Consumption	P _c	-	1.9	2.2	Watt	1
Differential Impedance	Z _m	90	100	110	Ohm	2
LAMP :						
Operating Voltage	V _{BL}	640(7.0mA)	675(6.0mA)	880(2.0mA)	V _{RMS}	
Operating Current	I _{BL}	2.0	6.0	7.0	mA _{RMS}	3
Power Consumption	P _{BL}	-	4.1	4.5		
Operating Frequency	f _{BL}	50	65	80	kHz	
Discharge Stabilization Time	T _s	-	-	3	Min	4
Life Time		15,000	-	-	Hrs	5
Established Starting Voltage at 25℃ at 0℃	V _s			1180	V _{RMS}	
				1415	V _{RMS}	

Note)

1. The specified current and power consumption are under the Vcc = 3.3V , 25℃ , fv = 60Hz condition whereas full black pattern is displayed and fv is the frame frequency.
2. This impedance value is needed to proper display and measured form LVDS Tx to the mating connector.
3. The typical operating current is for the typical surface luminance (L_{WH}) in optical characteristics.
4. Define the brightness of the lamp after being lighted for 5 minutes as 100%, Ts is the time required for the brightness of the center of the lamp to be not less than 95%.
5. The life time is determined as the time at which brightness of lamp is 50% compare to that of initial value at the typical lamp current.
6. The output of the inverter must have symmetrical(negative and positive) voltage waveform and symmetrical current waveform.(Asymmetrical ratio is less than 10%) Please do not use the inverter which has asymmetrical voltage and asymmetrical current and spike wave.
Lamp frequency may produce interface with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.
7. It is defined the brightness of the lamp after being lighted for 5 minutes as 100%.
T_s is the time required for the brightness of the center of the lamp to be not less than 95%.
8. The lamp power consumption shown above does not include loss of external inverter.
The applied lamp current is a typical one.


LG.PHILIPS LCD

LP141WP1

Liquid Crystal Display


Product Specification

Note)

9. Requirements for a system inverter design, which is intended to have a better display performance, a better power efficiency and a more reliable lamp, are following.

It shall help increase the lamp lifetime and reduce leakage current.

- The asymmetry rate of the inverter waveform should be less than 10%.
 - The distortion rate of the waveform should be within $\sqrt{2} \pm 10\%$.
- * Inverter output waveform had better be more similar to ideal sine wave.

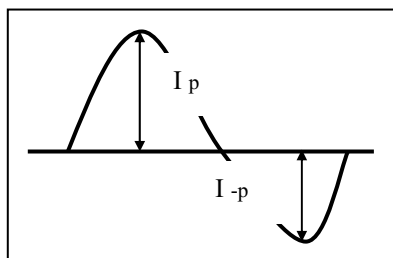

* Asymmetry rate:

$$\frac{|I_p - I_{-p}|}{I_{rms}} * 100\%$$

* Distortion rate

$$I_p \text{ (or } I_{-p}) / I_{rms}$$

- ※ Do not attach a conducting tape to lamp connecting wire.

If the lamp wire attach to a conducting tape, TFT-LCD Module has a low luminance and the inverter has abnormal action. Because leakage current is occurred between lamp wire and conducting tape.



LP141WP1
Liquid Crystal Display


Product Specification

3-2. Interface Connections

This LCD employs two interface connections, a 30 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.

The electronics interface connector is a model FI-XB30SRL-HF11 manufactured by JAE.

Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Pin	Symbol	Description	Notes
1	GND	Ground	1. Interface chips 1.1 LCD : DAWIN, DTML012(LCD Controller) including LVDS Receiver (DAWIN社, LVD4107x 2each) 1.2 System : it must include international standard LVDS Transmitter. * Pin to Pin compatible with LVDS 2. Connector 2.1 LCD : FI-XB30SRL-HF11, JAE or its compatibles 2.2 Mating : FI-X30M or equivalent. 2.3 Connector pin arrangement  [LCD Module Rear View]
2	VCC	Power Supply, 3.3V Typ.	
3	VCC	Power Supply, 3.3V Typ.	
4	V EEDID	DDC 3.3V power	
5	BIST	Requested for LCD supplier test point	
6	Clk EEDID	DDC Clock	
7	DATA EEDID	DDC Data	
8	RA1-	Negative LVDS differential data input, R0-R5, G0	
9	RA1+	Positive LVDS differential data input, R0-R5, G0	
10	GND	Ground	
11	RB1-	Negative LVDS differential data input, G1-G5, B0-B1	
12	RB1+	Positive LVDS differential data input, G1-G5, B0-B1	
13	GND	Ground	
14	RC1-	Negative LVDS differential data input, B2-B5, HS/VS/DE	
15	RC1+	Positive LVDS differential data input, B2-B5, HS/VS/DE	
16	GND	Ground	
17	RCLK1-	Negative LVDS differential clock input	
18	RCLK1+	Positive LVDS differential clock input	
19	GND	Ground	
20	RA2-	Negative LVDS differential data input, R0-R5, G0	
21	RA2+	Positive LVDS differential data input, R0-R5, G0	
22	NC	Ground	
23	RB2-	Negative LVDS differential data input, G1-G5, B0-B1	
24	RB2+	Positive LVDS differential data input, G1-G5, B0-B1	
25	NC	Ground	
26	RC2-	Negative LVDS differential data input, B2-B5, HS/VS/DE	
27	RC2+	Positive LVDS differential data input, B2-B5, HS/VS/DE	
28	NC	Ground	
29	RCLK2-	Negative LVDS differential clock input	
30	RCLK2+	Positive LVDS differential clock input	

The backlight interface connector is a model BHSR-02VS-1, manufactured by JST or Compatible.

The mating connector part number is SM02B-BHSS-1 or equivalent.

Table 5. BACKLIGHT CONNECTOR PIN CONFIGURATION (J3)

Pin	Symbol	Description	Notes
1	HV	Power supply for lamp (High voltage side)	1
2	LV	Power supply for lamp (Low voltage side)	1

Notes : 1. The high voltage side terminal is colored pink and the low voltage side terminal is Green.



LP141WP1
Liquid Crystal Display

Product Specification

3-3. Signal Timing Specifications

This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.


Table 6. TIMING TABLE

ITEM	Symbol		Min	Typ	Max	Unit	Note
DCLK	Frequency	f_{CLK}	87.2	88.896	90.8	MHz	
Hsync	Period	T_{HP}	1576	1600	1624	tCLK	
	Width	t_{WH}	24	32	40		
	Width-Active	t_{WHA}	1440	1440	1440		
Vsync	Period	t_{VP}	922	926	932	tHP	
	Width	t_{WV}	4	6	8		
	Width-Active	t_{WVA}	900	900	900		
Data Enable	Horizontal back porch	t_{HBP}	72	80	88	tCLK	
	Horizontal front porch	t_{HFP}	40	48	56		
	Vertical back porch	t_{VBP}	15	17	19	tHP	
	Vertical front porch	t_{VFP}	3	3	5		

3-4. Signal Timing Waveforms

Condition : VCC = 3.3V

Data Enable, Hsync, Vsync

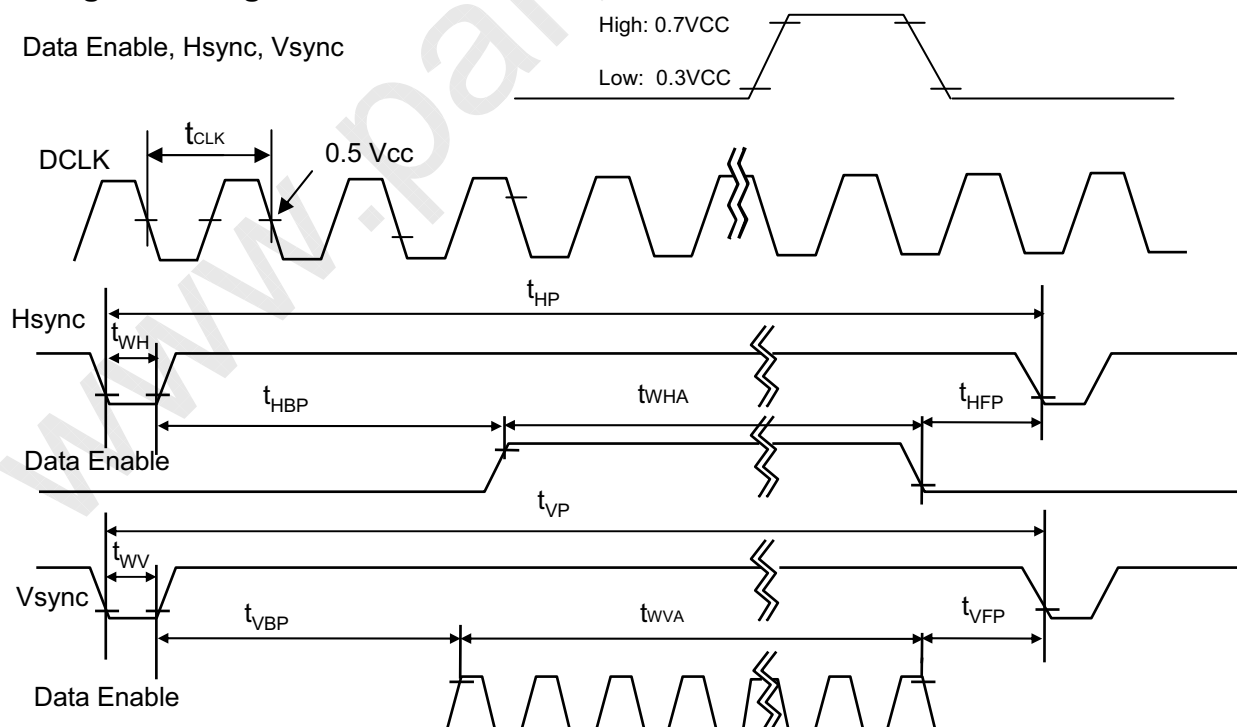



LG.PHILIPS LCD



LP141WP1

Liquid Crystal Display

Product Specification

3-5. Color Input Data Reference

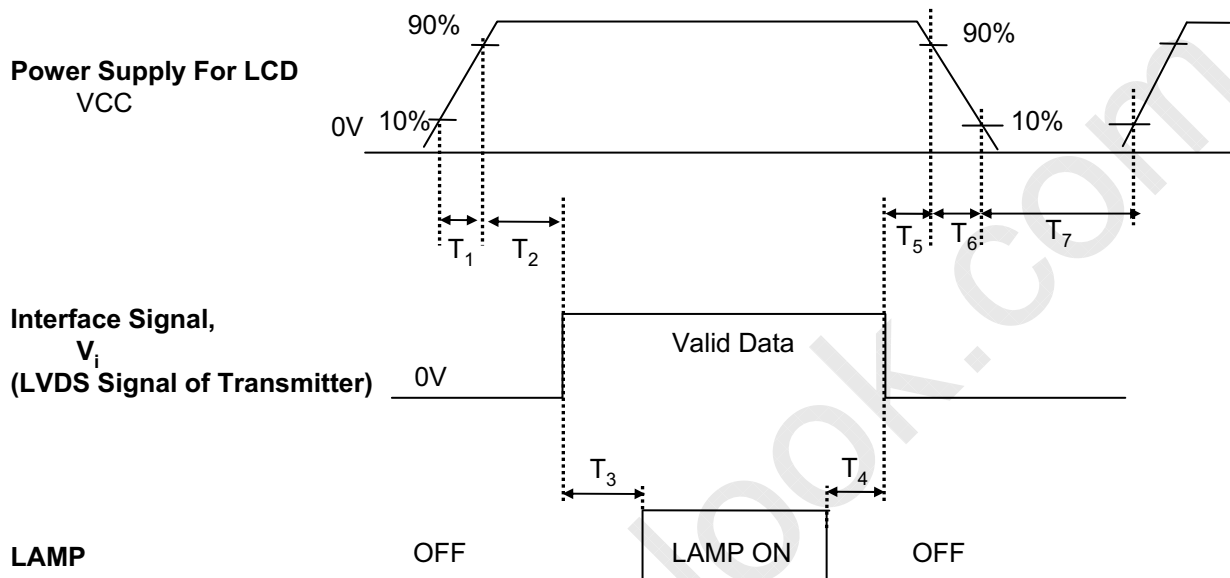
The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 7. COLOR DATA REFERENCE

Color		Input Color Data																	
		RED						GREEN						BLUE					
		MSB			LSB			MSB			LSB			MSB			LSB		
		R 5	R 4	R 3	R 2	R 1	R 0	G 5	G 4	G 3	G 2	G 1	G 0	B 5	B 4	B 3	B 2	B 1	B 0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	...																		
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	...																		
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
BLUE	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	...																		
	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1


LG.PHILIPS LCD

LP141WP1
 Liquid Crystal Display

Product Specification
3-6. Power Sequence

Table 8. POWER SEQUENCE TABLE

Parameter	Value			Units
	Min.	Typ.	Max.	
T ₁	-	-	10	(ms)
T ₂	0	-	50	(ms)
T ₃	200	-	-	(ms)
T ₄	200	-	-	(ms)
T ₅	0	-	50	(ms)
T ₆	-	-	10	(ms)
T ₇	400	-	-	(ms)

Note)

1. Please avoid floating state of interface signal at invalid period.
2. When the interface signal is invalid, be sure to pull down the power supply for LCD VCC to 0V.
3. Lamp power must be turn on after power supply for LCD and interface signal are valid.

Product Specification

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

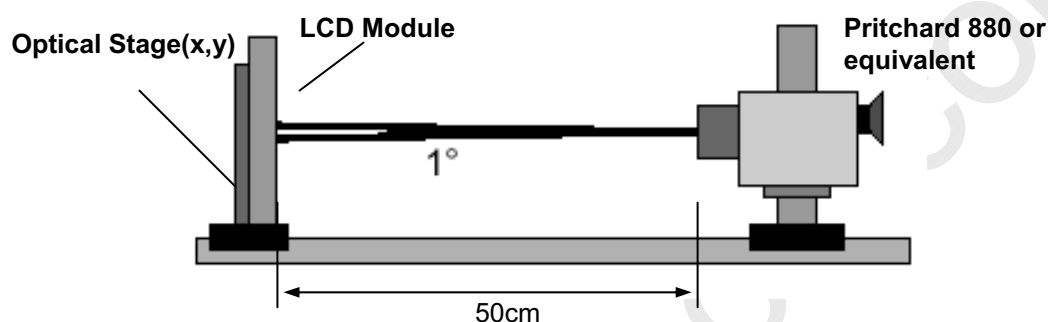


Table 9. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, fv=60Hz, fCLK= 88.896MHz, IBL= 6.3mA

Parameter	Symbol	Values			Units	Notes
		Min	Typ	MAx		
Contrast Ratio	CR	300	-	-		1
Surface Luminance, white	L _{WH}	-	220	-	cd/m ²	2
Luminance Variation	δ_{WHITE}	-	1.85	2.0		3
Response Time						4
Rise Time	Tr _R	-	10	15	ms	
Delay Time	Tr _D	-	20	25	ms	
Color Coordinates						
RED	RX	0.558	0.588	0.618		
	RY	0.316	0.346	0.376		
GREEN	GX	0.298	0.328	0.358		
	GY	0.519	0.549	0.579		
BLUE	BX	0.127	0.157	0.187		
	BY	0.112	0.142	0.172		
WHITE	WX	0.283	0.313	0.343		
	WY	0.299	0.329	0.359		
Viewing Angle						5
x axis, right($\Phi=0^\circ$)	Θ_r	40	-	-	degree	
x axis, left ($\Phi=180^\circ$)	Θ_l	40	-	-	degree	
y axis, up ($\Phi=90^\circ$)	Θ_u	15	-	-	degree	
y axis, down ($\Phi=270^\circ$)	Θ_d	30	-	-	degree	
Gray Scale						6



LP141WP1
Liquid Crystal Display

Product Specification

Note)

1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

$$L_{WH} = \text{Average}(L_1, L_2, \dots L_5)$$

3. The variation in surface luminance, The panel total variation (δ_{WHITE}) is determined by measuring L_N at each test position 1 through 13 and then defined as followed numerical formula.
For more information see FIG 2.

$$\delta_{WHITE} = \frac{\text{Maximum}(L_1, L_2, \dots L_{13})}{\text{Minimum}(L_1, L_2, \dots L_{13})}$$

4. Response time is the time required for the display to transition from white to black (rise time, Tr_R) and from black to white(Decay Time, Tr_D). For additional information see FIG 3.

5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6. Gray scale specification

* $f_V = 60\text{Hz}$

Gray Level	Luminance [%] (Typ)
L0	0.17
L7	0.67
L15	4.17
L23	11.89
L31	23.57
L39	39.2
L47	58.9
L55	80.5
L63	100



LG.PHILIPS LCD

LP141WP1
Liquid Crystal Display

Product Specification

FIG. 2 Luminance

<measuring point for surface luminance & measuring point for luminance variation>


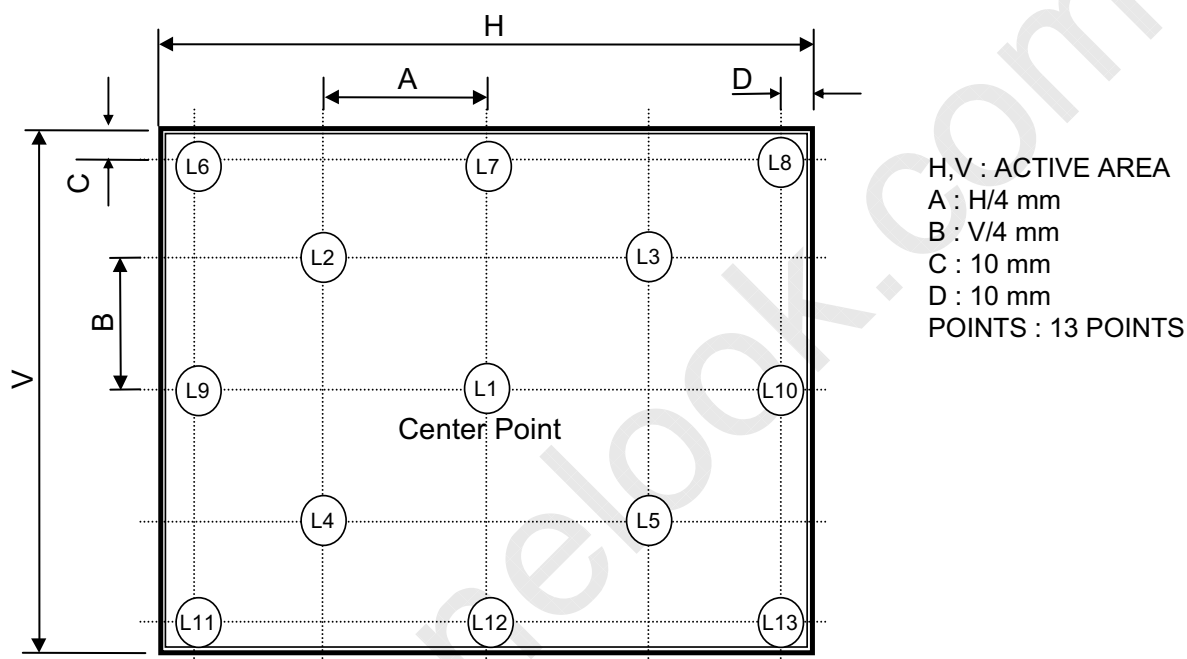


FIG. 3 Response Time


The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

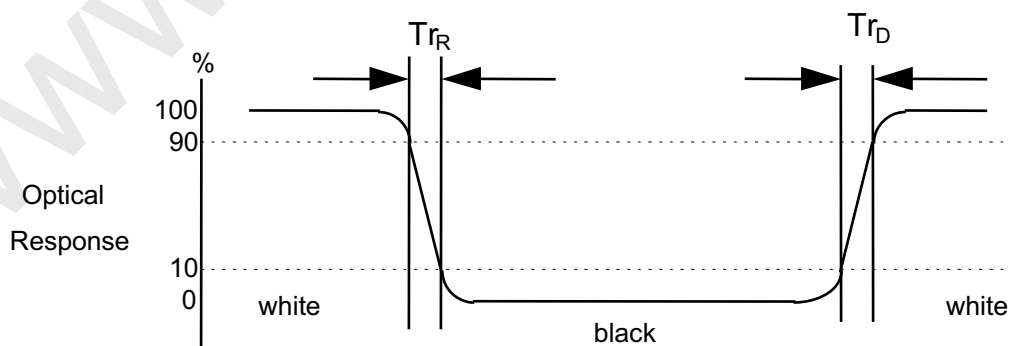

Product Specification

FIG. 4 Viewing angle

<Dimension of viewing angle range>

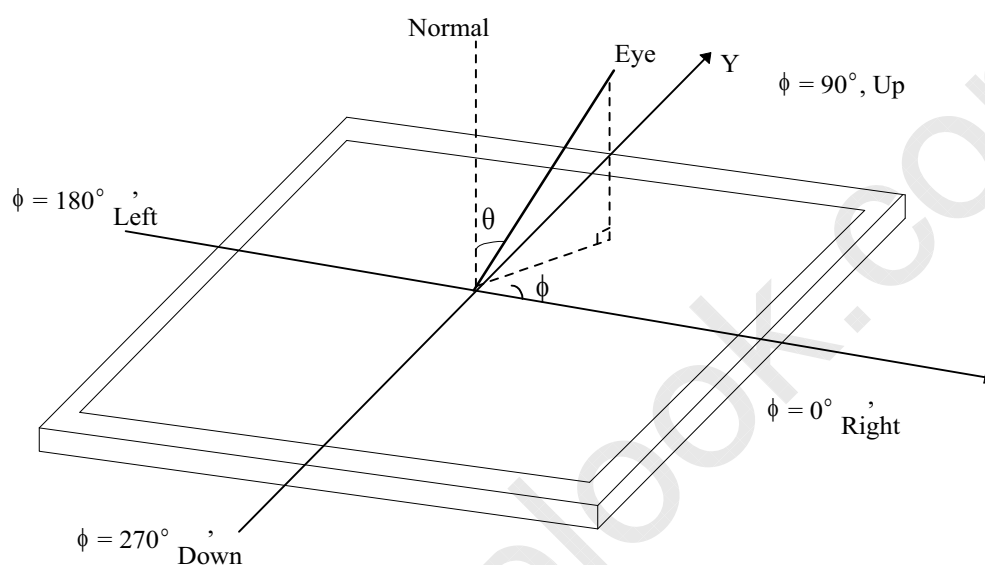



LG.PHILIPS LCD

LP141WP1
Liquid Crystal Display

Product Specification

5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model LP141WP1. In addition the figures in the next page are detailed mechanical drawing of the LCD.

Outline Dimension	Horizontal	319.5 ± 0.5mm
	Vertical	205.5 ± 0.5mm
	Depth	5.5mm (max)
Bezel Area	Horizontal	306.76 ± 0.5mm
	Vertical	193 ± 0.5mm
Active Display Area	Horizontal	303.69 mm
	Vertical	189.81 mm
Weight	425g (Typ.) 435g (Max.)	
Surface Treatment	Anti-glare treatment of the front polarizer	




LP141WP1
Liquid Crystal Display

Product Specification

<FRONT VIEW>

Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$

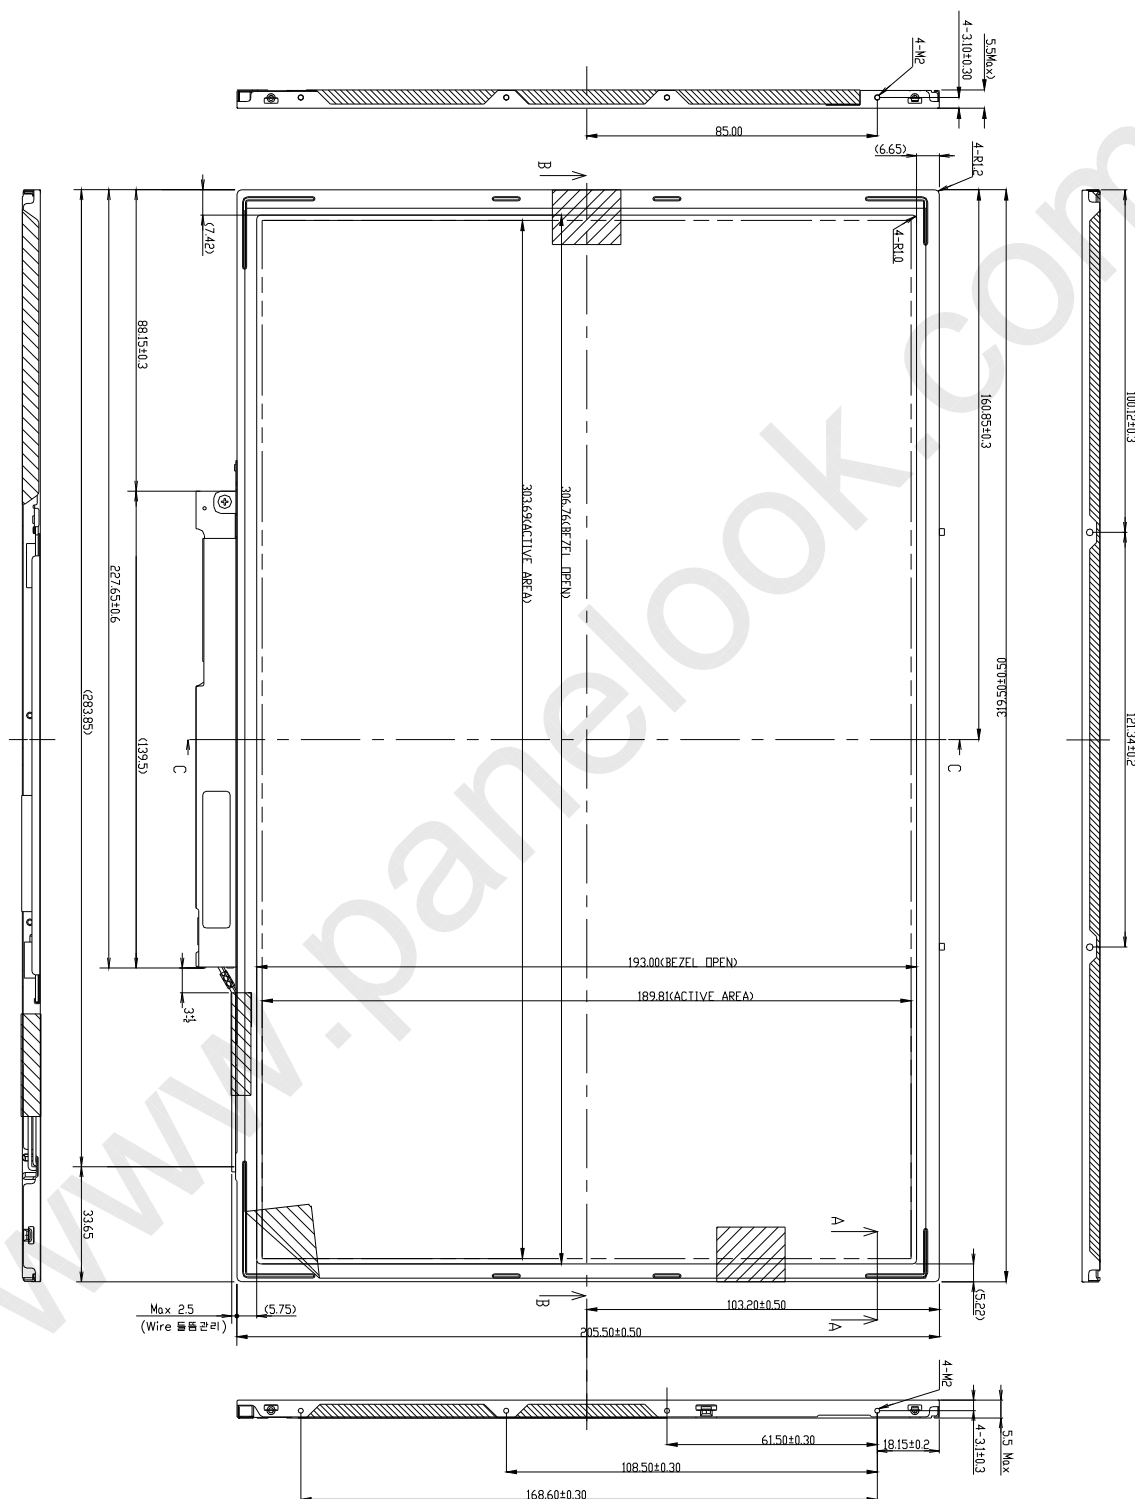

Ver. 0.0

Nov. 15, 2006

17 / 27




LP141WP1
Liquid Crystal Display

Product Specification

<REAR VIEW>

Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$

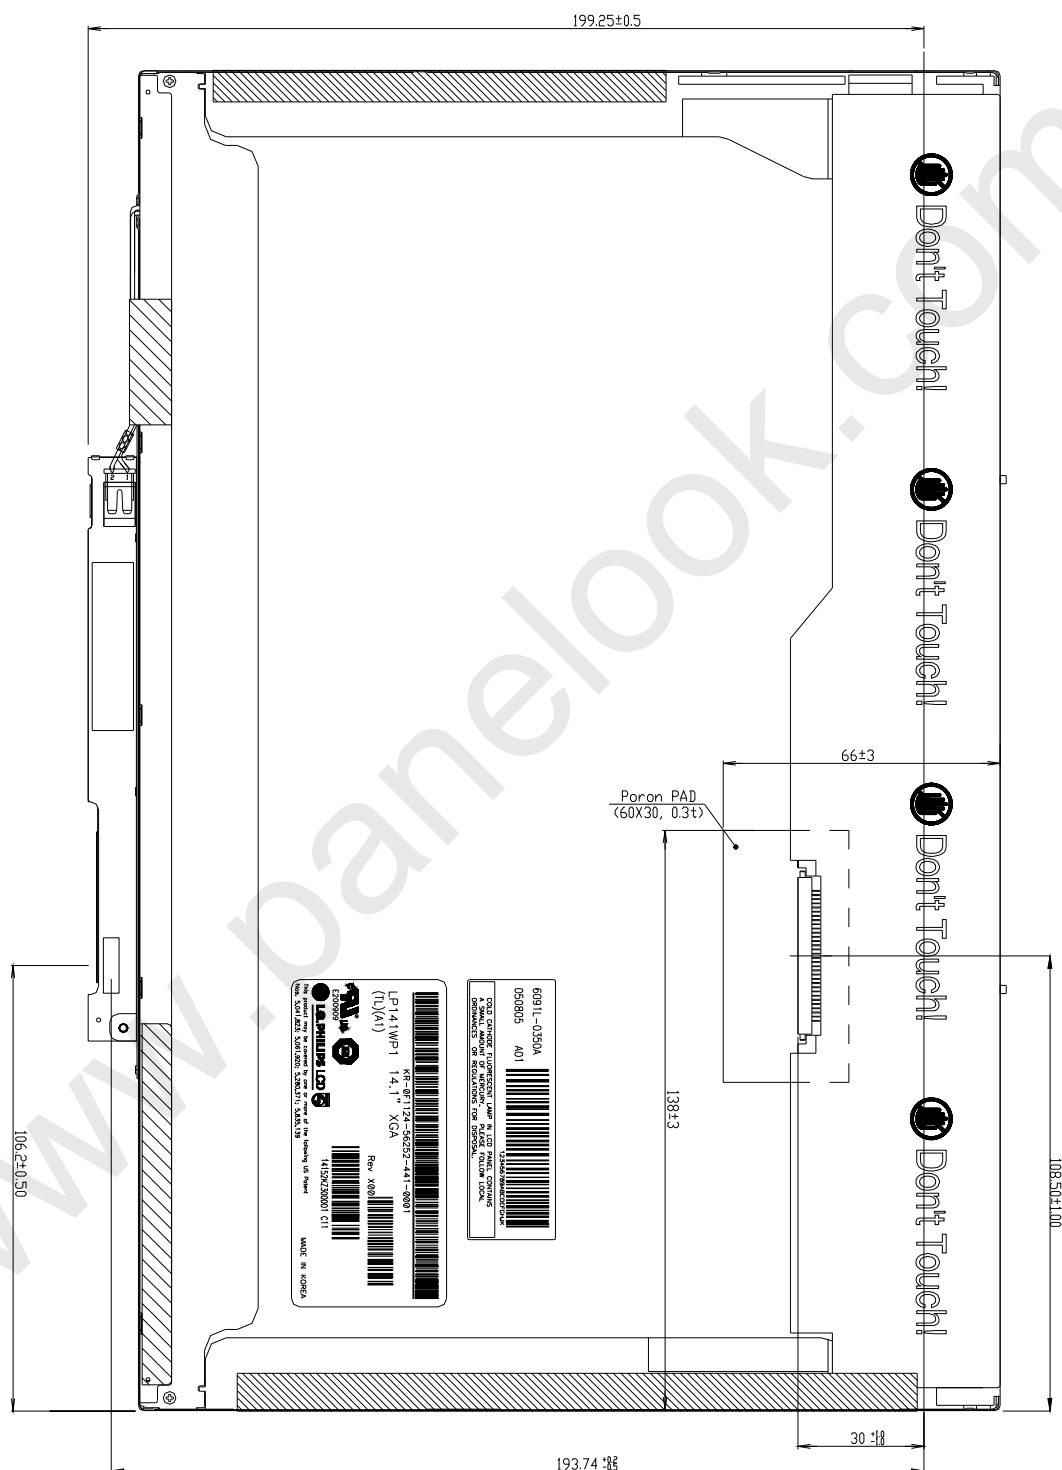




LP141WP1
Liquid Crystal Display

Product Specification

[DETAIL DESCRIPTION OF SIDE MOUNTING SCREW]

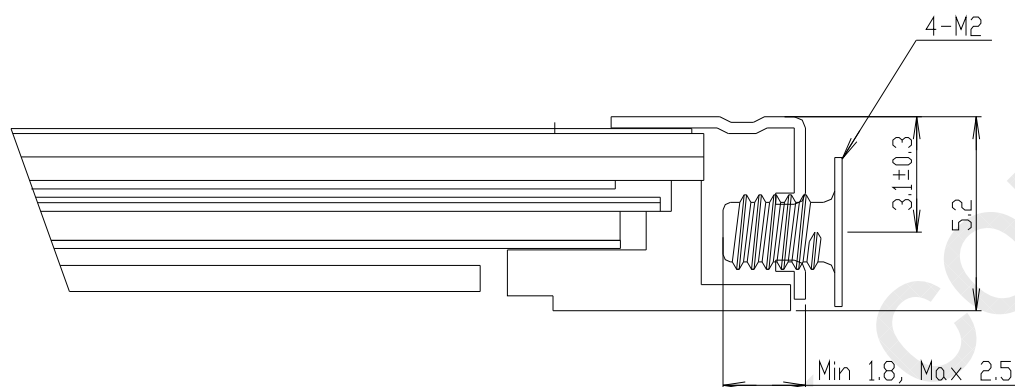

SECTION A-A
SCALE 5/1

*SCREW(8ea) TORQUE : 2kgf.cm max

*Mounting SCREW Depth : 2.5mm max

Note) Unit:[mm], General tolerance: ± 0.5 mm

LP141WP1
Liquid Crystal Display

Product Specification

6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Sine wave, 10 ~ 500 ~ 10Hz, 1.5G, 0.37oct/min 3 axis, 1hour/axis
6	Shock test (non-operating)	Half sine wave, 180G, 2ms one shock of each six faces(I.e. run 180G 6ms for all six faces)
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr

{ Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

**LG.PHILIPS LCD**

LP141WP1

Liquid Crystal Display

Product Specification**7. International Standards****7-1. Safety**

- a) UL 60950, Third Edition, Underwriters Laboratories, Inc., Dated Dec. 11, 2000.
Standard for Safety of Information Technology Equipment, Including Electrical Business Equipment.
- b) CAN/CSA C22.2, No. 60950, Third Edition, Canadian Standards Association, Dec. 1, 2000.
Standard for Safety of Information Technology Equipment, Including Electrical Business Equipment.
- c) EN 60950 : 2000, Third Edition
IEC 60950 : 1999, Third Edition
European Committee for Electrotechnical Standardization(CENELEC)
EUROPEAN STANDARD for Safety of Information Technology Equipment Including Electrical Business Equipment.

7-2. EMC

- a) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHz to 40GHz." American National Standards Institute(ANSI), 1992
- b) C.I.S.P.R "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special Committee on Radio Interference.
- c) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization.(CENELEC), 1998
(Including A1: 2000)



LG.PHILIPS LCD

LP141WP1
Liquid Crystal Display

Product Specification

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)

E : MONTH

G : ASSEMBLY CODE

D : YEAR

F : FACTORY CODE

H ~ M : SERIAL NO.

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

3. FACTORY CODE

Factory Code	LPL Gumi	LPL Nanjing	HEESUNG
Mark	K	C	D

4. SERIAL NO.

Mark	100001~199999, 200001~299999, 300001~399999,, A00001~A99999,, Z00001~Z99999
------	---

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one box : 20ea

b) Box Size : 430 X 334 X 287



LG.PHILIPS LCD



LP141WP1

Liquid Crystal Display

Product Specification

9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
 $V = \pm 200\text{mV}$ (Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.

LP141WP1
Liquid Crystal Display

Product Specification

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.



LG.PHILIPS LCD



LP141WP1

Liquid Crystal Display

Product Specification

	Byte	Field Name and Comments	Value	Value
	(hex)		(hex)	(binary)
Header	0	Header	00	00000000
	1	Header	FF	11111111
	2	Header	FF	11111111
	3	Header	FF	11111111
	4	Header	FF	11111111
	5	Header	FF	11111111
	6	Header	FF	11111111
	7	Header	00	00000000
Vendor / Product EDID Version	8	EISA manufacture code = LPL	32	00110010
	9	EISA manufacture code (Compressed ASCII)	0C	00001100
	0A	Panel Supplier Reserved - Product Code = E0	E0	11100000
	0B	Panel Supplier Reserved - Product Code = 00	00	00000000
	0C	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000
	0D	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000
	0E	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000
	0F	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000
	10	Week of manufacture	00	00000000
	11	Year of manufacture = 2006	10	00010000
Display Parameters	12	EDID structure version # = 1	01	00000001
	13	EDID revision # = 3	03	00000011
	14	Video input definition = Digital I/p,non TMDS CRGB	80	10000000
	15	Max H image size(cm) = 30.369cm(30)	1E	00011110
	16	Max V image size(cm) = 18.981cm(19)	13	00010011
Panel Color Coordinates	17	Display gamma = 120 (2.2 x100 - 100)	78	01111000
	18	Feature support(DPMS) = Active off, RGB Color	0A	00001010
	19	Red/Green low Bits	AE	10101110
	1A	Blue/White Low Bits	10	00010000
	1B	Red X Rx = 0.588	96	10010110
	1C	Red Y Ry = 0.346	58	01011000
	1D	Green X Gx = 0.328	53	01010011
	1E	Green Y Gy = 0.549	8C	10001100
	1F	Blue X Bx = 0.157	28	00101000
	20	Blue Y By = 0.142	24	00100100
Established Timings	21	White X Wx = 0.313	50	01010000
	22	White Y Wy = 0.329	54	01010100
	23	Established Timing I	00	00000000
	24	Established Timing II	00	00000000
	25	Manufacturer's Timings	00	00000000
Standard Timing ID	26	Standard Timing Identification 1 was not used	01	00000001
	27	Standard Timing Identification 1 was not used	01	00000001
	28	Standard Timing Identification 2 was not used	01	00000001
	29	Standard Timing Identification 2 was not used	01	00000001
	2A	Standard Timing Identification 3 was not used	01	00000001
	2B	Standard Timing Identification 3 was not used	01	00000001
	2C	Standard Timing Identification 4 was not used	01	00000001
	2D	Standard Timing Identification 4 was not used	01	00000001
	2E	Standard Timing Identification 5 was not used	01	00000001
	2F	Standard Timing Identification 5 was not used	01	00000001
	30	Standard Timing Identification 6 was not used	01	00000001
	31	Standard Timing Identification 6 was not used	01	00000001
	32	Standard Timing Identification 7 was not used	01	00000001
	33	Standard Timing Identification 7 was not used	01	00000001
	34	Standard Timing Identification 8 was not used	01	00000001
	35	Standard Timing Identification 8 was not used	01	00000001



LG.PHILIPS LCD



LP141WP1

Liquid Crystal Display

Product Specification

	Byte (hex)	Field Name and Comments	Value (hex)	Value (binary)
Timing Descriptor #1	36	1440 X 900 @ 60Hz mode : pixel clock = 88.896MHz	B9	10111001
	37	(Stored LSB first)	22	00100010
	38	Horizontal Active = 1440 pixels	A0	10100000
	39	Horizontal Blanking = 160 pixels	A0	10100000
	3A	Horizontal Active : Horizontal Blanking = 1440 : 160	50	01010000
	3B	Vertical Active = 900 lines	84	10000100
	3C	Vertical Blanking = 26 lines	1A	00011010
	3D	Vertical Active : Vertical Blanking = 900 : 26	30	00110000
	3E	Horizontal Sync. Offset = 48 pixels	30	00110000
	3F	Horizontal Sync Pulse Width = 32 pixels	20	00100000
	40	Vertical Sync Offset = 3 lines, Sync Width = 6 lines	36	00110110
	41	Horizontal Vertical Sync Offset/Width upper 2bits = 0	00	00000000
	42	Horizontal Image Size = 303.696mm(304)	30	00110000
	43	Vertical Image Size = 189.81mm(190)	BE	10111110
	44	Horizontal & Vertical Image Size	10	00010000
	45	Horizontal Border = 0	00	00000000
	46	Vertical Border = 0	00	00000000
Timing Descriptor #2	47	Non-interlaced, Normal display, no stereo, Digital separate sync, H/V pol negatives	18	00011000
	48	1440 X 900 @ 60Hz mode : pixel clock = 88.896MHz	B9	10111001
	49	(Stored LSB first)	22	00100010
	4A	Horizontal Active = 1440 pixels	A0	10100000
	4B	Horizontal Blanking = 160 pixels	A0	10100000
	4C	Horizontal Active : Horizontal Blanking = 1440 : 160	50	01010000
	4D	Vertical Active = 900 lines	84	10000100
	4E	Vertical Blanking = 26 lines	1A	00011010
	4F	Vertical Active : Vertical Blanking = 900 : 26	30	00110000
	50	Horizontal Sync. Offset = 48 pixels	30	00110000
	51	Horizontal Sync Pulse Width = 32 pixels	20	00100000
	52	Vertical Sync Offset = 3 lines, Sync Width = 6 lines	36	00110110
	53	Horizontal Vertical Sync Offset/Width upper 2bits = 0	00	00000000
	54	Horizontal Image Size = 303.696mm(304)	30	00110000
	55	Vertical Image Size = 189.81mm(190)	BE	10111110
	56	Horizontal & Vertical Image Size	10	00010000
	57	Horizontal Border = 0	00	00000000
	58	Vertical Border = 0	00	00000000
Timing Descriptor #3 Dell specific information	59	Module "A" Revision (Example : 00, 01, 02, 03, etc.)	00	00000000
	5A	Flag	00	00000000
	5B	Flag	00	00000000
	5C	Flag	00	00000000
	5D	Dummy Descriptor	FE	11111110
	5E	Flag	00	00000000
	5F	Dell P/N 1st Character = J	4A	01001010
	60	Dell P/N 2st Character = W	57	01010111
	61	Dell P/N 3st Character = 8	38	00111000
	62	Dell P/N 4st Character = 0	30	00110000
	63	Dell P/N 5st Character = 4	34	00110100
	64	LCD Supplier EEDID Revision # = VER 0.0	00	00000000
	65	Manufacturer P/N = 1	31	00110001
	66	Manufacturer P/N = 4	34	00110100
	67	Manufacturer P/N = 1	31	00110001
	68	Manufacturer P/N = W	57	01010111
	69	Manufacturer P/N = P	50	01010000
	6A	Manufacturer P/N = 1	31	00110001
	6B	Manufacturer P/N(If<13 char, then terminate with ASCII code 0Ah,set remaining char = 20h)	0A	00001010



LG.PHILIPS LCD



LP141WP1

Liquid Crystal Display

Product Specification

	Byte (hex)	Field Name and Comments	Value (hex)	Value (binary)
Timing Descriptor #4	6C	Flag	00	00000000
	6D	Flag	00	00000000
	6E	Flag	00	00000000
	6F	Data Type Tag : Undefined	FE	11111110
	70	Flag	00	00000000
	71	SMBUS Value = 10 nits +/- 10% (5 - point average)	1F	00011111
	72	SMBUS Value = 17 nits +/- 10% (5 - point average)	2F	00101111
	73	SMBUS Value = 24 nits +/- 10% (5 - point average)	37	00110111
	74	SMBUS Value = 30 nits +/- 10% (5 - point average)	3F	00111111
	75	SMBUS Value = 60 nits +/- 10% (5 - point average)	6F	01101111
	76	SMBUS Value = 110 nits +/- 10% (5 - point average)	87	10000111
	77	SMBUS Value = 150 nits +/- 10% (5 - point average)	9F	10011111
	78	SMBUS Value = MAX nits (Typically = FFh, 220 nits)	D7	11010111
	79	Number of LVDS receiver = 2	02	00000010
	7A	Panel self Test(00 - Not present, 01 - Present)	01	00000001
	7B	(If<13 char,then terminate with ASCII code 0Ah, set remaining char=20h)	0A	00001010
Checksum	7C	(If<13 char,then terminate with ASCII code 0Ah, set remaining char=20h)	20	00100000
	7D	(If<13 char,then terminate with ASCII code 0Ah, set remaining char=20h)	20	00100000
	7E	Extension flag = 00	00	00000000
	7F	Checksum	56	01010110